

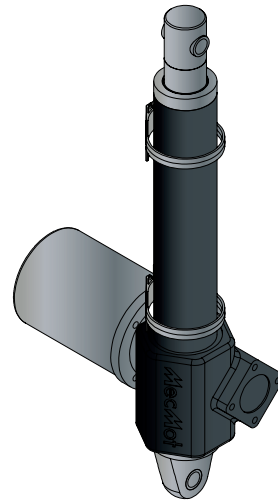


EP6-AC/DC Max 8 kN

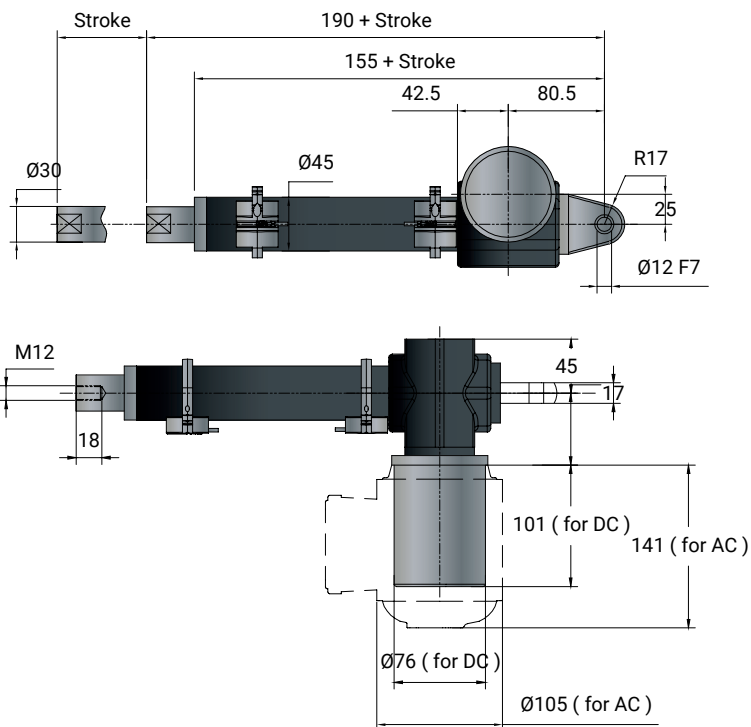


GENERAL FEATURES

Permanent magnet DC motor
Three phase or single phase motor
Worm gearbox
Acme Lead Screw
Chrome plated push rod
Working temperature range -10 C - +60 C
Potentiometer and encoder on request
Duty %30 (5 min) a +30 C

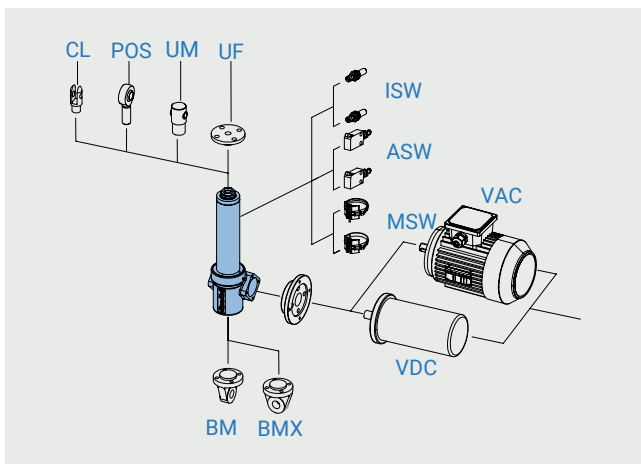

-  V1-Double output without motor
-  V2-Right output without motor
-  V3-Left output without motor
-  V4-Left output with motor flange
-  V5-Right output with motor flange
-  V6-Left motor flange - right output
-  V7-Right motor flange - left output

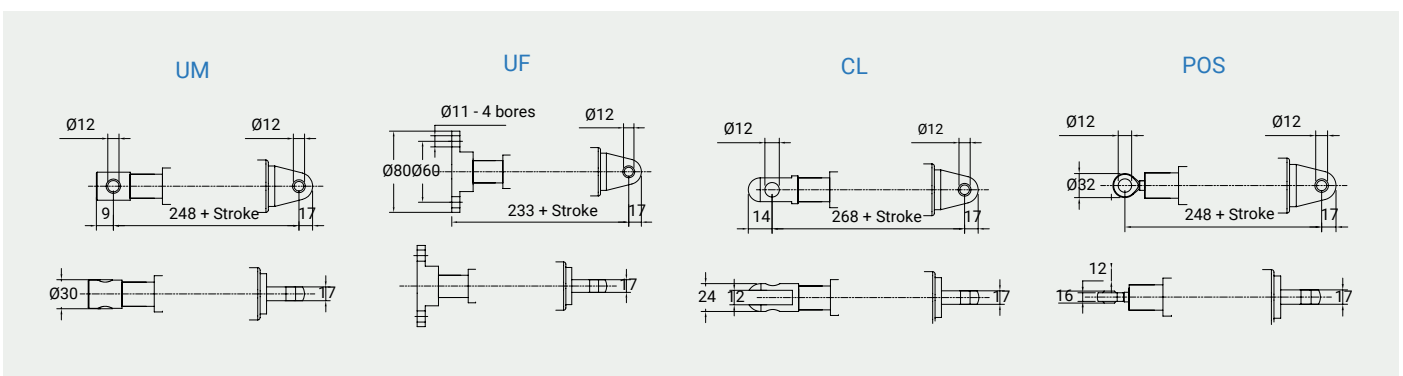

EP6 (Vac 3-phase)					
F _{max} (N)	Speed (mm/s)	Version	Motor Size	Motor Power (KW)	Motor Speed (KW)
500	46	A01	IEC56	0,09	2800
900	30	A02	IEC56	0,09	2800
1800	15	A03	IEC56	0,09	2800
3850	7,5	A04	IEC56	0,09	2800
8000	3,7	A05	IEC56	0,09	2800

EP6 (Vdc)						
F _{max} (N)	Speed (mm/s)	Version	Motor Size	Motor Power	Motor Speed (rpm)	Max Current for F _{max} (A) 24Vdc
500	46	A11	IEC56	0,09	2800	12
900	30	A21	IEC56	0,09	2800	12
1800	15	A31	IEC56	0,09	2800	12
3850	7,5	A41	IEC56	0,09	2800	12
8000	3,7	A51	IEC56	0,09	2800	12