


### Profile

- Hollow shaft, max.  $\varnothing$  14 mm
- Counter with 4 decades and fine reading
- Detent as an option
- Magnifying function for good readability
- Stainless-steel driving shaft as an option
- Axial seal, dustproof and splash-proof
- Clamping plate (see accessories)

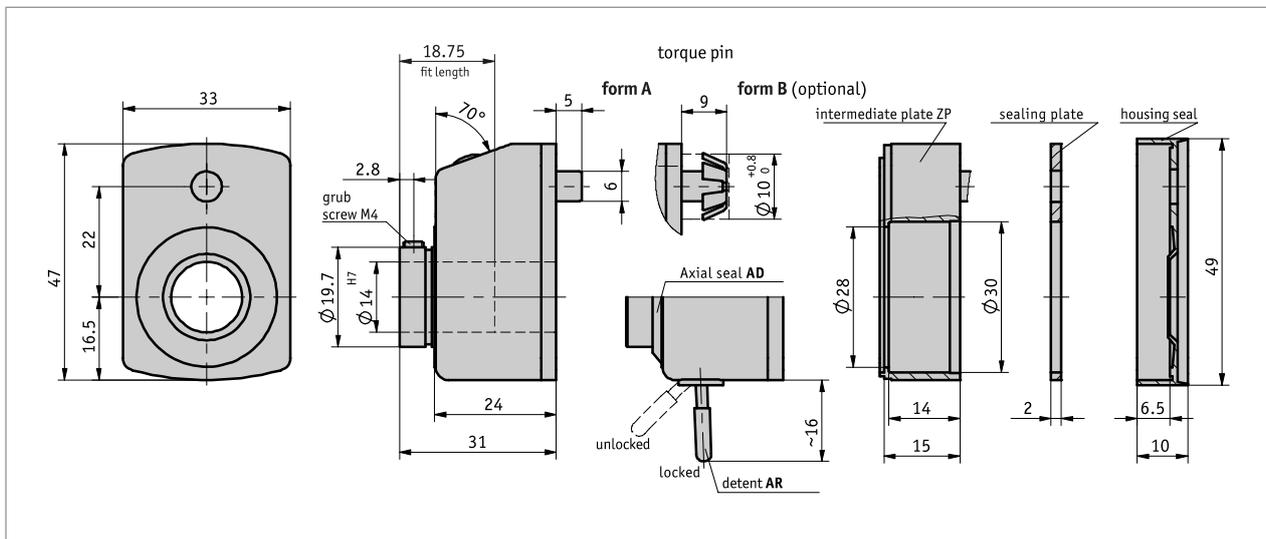

### Mechanical data

| Feature      | Technical data              | Additional information     |
|--------------|-----------------------------|----------------------------|
| Housing      | reinforced plastic          |                            |
| Sight window | plastic                     | mineral glass as an option |
| Counter      | 4 Decades with fine reading |                            |
| Digit height | ~6 mm                       |                            |
| Weight       | 0.05 kg                     |                            |

### ■ max. speed

| Display (after 1st revolution) | max. speed [rpm] |
|--------------------------------|------------------|
| 0010                           | 500 (1500)       |
| 0015                           | 500 (1000)       |
| 0020                           | 500 (750)        |
| 0025                           | 500 (600)        |
| 0030                           | 500              |
| 0040                           | 375              |
| 0050                           | 300              |
| 0060                           | 275              |
| 0080                           | 180              |
| 0100                           | 150              |



Speeds >500 rpm must only be run for short periods.

#### Formula:

$$\text{max. speed} = \frac{15000}{\text{indication after 1st revolution}}$$

### Ambient conditions

| Feature             | Technical data | Additional information |
|---------------------|----------------|------------------------|
| Ambient temperature | 0 ... 80 °C    |                        |

