

# **Technical data sheet Energetic diffuse sensor set**

Part no.: 50125988

SET ET5 + BT205M



### Contents

- Set consists of
- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Further information







# Set consists of



	Quantity	Part no.	Designation	Article	Description
_[	1	50122579	ET5.3/4P	Energetic diffuse sensor	Operating range limit, white 90%: 0 1 m Light source: LED, Red Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, PNP, Light switching Switching output 2: Transistor, PNP, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 4 -wire Operational controls: Teach button

# **Technical data**

8	20	icc	lata
$\mathbf{L}$	ฉอ	ic c	ıata

Series	5
Operating principle	Diffuse reflection principle
Contains	1x BT 205M
	2x M3 x 8 screw

### Special version

#### **Optical data**

Option data	
Operating range	Guaranteed operating range
Operating range, white 90%	0.001 0.7 m
Operating range, gray 50%	0.001 0.59 m
Operating range, gray 18%	0.003 0.39 m
Operating range, black 6%	0.005 0.28 m
Operating range limit	Typical operating range
Operating range limit, white 90%	0 1 m
Operating range limit, gray 50%	0.001 0.85 m
Operating range limit, gray 18%	0.003 0.55 m
Operating range limit, black 6%	0.002 0.4 m
Light source	LED, Red
LED light wavelength	620 nm
Transmitted-signal shape	Pulsed
LED group	Exempt group (in acc. with EN 62471)

#### **Electrical data**

Protective circuit		Polarity reversal protection
		Short circuit protected
	Performance data	
	Supply voltage U <sub>B</sub>	10 30 V, DC, Incl. residual ripple
	Residual ripple	0 15 %, From U <sub>B</sub>
	Open-circuit current	0 20 mA

# Outputs

Number of digita	I switching outputs	2 Piece(s)

Switching outputs	Switching	outputs
-------------------	-----------	---------

Voltage type	DC
Switching current, max.	100 mA
Switching voltage	high: ≥(U <sub>B</sub> -2.5V)
	low: ≤2.5V

### Switching output 1

Assignment	Connection 1, conductor 4
Switching element	Transistor, PNP
Switching principle	Light switching

### Switching output 2

Assignment	Connection 1, conductor 2
Switching element	Transistor, PNP
Switching principle	Dark switching

#### **Timing**

Switching frequency	500 Hz
Response time	1 ms
Readiness delay	300 ms

#### Connection

Connection 1	
Function	Signal OUT
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm²

### **Mechanical data**

Dimension (W x H x L)	14 mm x 32.5 mm x 20.2 mm
Housing material	Plastic
Plastic housing	ABS
Lens cover material	Plastic
Housing color	Black
	Red

### **Operation and display**

Type of display	LED
Number of LEDs	2 Piece(s)
Operational controls	Teach button

### **Environmental data**

Ambient temperature, operation	-40 60 °C	
Ambient temperature, storage	-40 60 °C	

### Certifications

Degree of protection	IP 67
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2020-12-23


# **Technical data**



Customs tariff number	85365019
eCl@ss 5.1.4	27270903
eCI@ss 8.0	27270903
eCl@ss 9.0	27270903
eCl@ss 10.0	27270903
eCl@ss 11.0	27270903
ETIM 5.0	EC001821
ETIM 6.0	EC001821
ETIM 7.0	EC001821

# **Dimensioned drawings**

All dimensions in millimeters

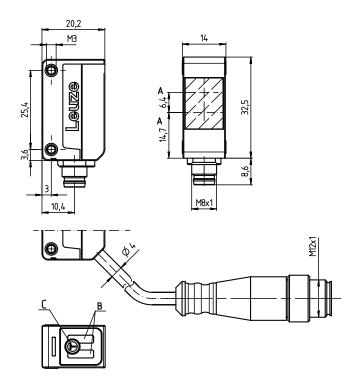

# **Electrical connection**

### **Connection 1**

Function	Signal OUT
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm <sup>2</sup>


# **Electrical connection**




# Conductor color Conductor assignment

Brown	V+
White	OUT 2
Blue	GND
Black	OUT 1

# **Diagrams**





# **Operation and display**

LED	Display	Meaning
1	Yellow, continuous light	Object detected
2	Green, continuous light	Operational readiness

# Part number code

Part designation: AAA5d.EE/ ff-GG-hh-I

AAA5	Operating principle / construction  HT5: diffuse reflection sensor with background suppression LS5: throughbeam photoelectric sensor transmitter LE5: throughbeam photoelectric sensor receiver ET5: energetic diffuse reflection sensor FT5: diffuse reflection sensor with fading PRK5: retro-reflective photoelectric sensor with polarization filter
d	Light type n/a: red light I: infrared light
EE	Equipment  1: adjustable range M: for semi-transparent objects H: for the detection of transparent films X: reinforced fading 3: teach-in via button

R: combination product for reflector DTKS 30x50

### Part number code



ff	Switching output / function / OUT1OUT2 (OUT1 = pin 4, OUT2 = pin 2)  2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching X: pin not used 9: deactivation input (deactivation with high signal) D: deactivation input (deactivation with low signal)
GG	Version P1: narrow light beam
hh	Electrical connection n/a: cable, standard length 2000 mm, 4-wire M8: M8 connector, 4-pin (plug) M8.3: M8 connector, 3-pin (plug) 200-M8: cable, length 200 mm with M8 connector, 4-pin, axial (plug) 200-M8.3: cable, length 200 mm with M8 connector, 3-pin, axial (plug) 200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug) M8.1: Snap-in, M8 connector, 4-pin (plug)
I	Configuration P1: different configuration

### Note



🖔 A list with all available device types can be found on the Leuze website at www.leuze.com.

### **Notes**



### Observe intended use!



- $\ ^{\mbox{\tiny $b$}}$  This product is not a safety sensor and is not intended as personnel protection.

### For UL applications:



- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

# **Further information**

- Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40  $^{\circ}\text{C}$
- · With the set scanning range, a tolerance of the operating range is possible depending on the reflection properties of the material surface.