


Fork and angle sensors

OGUM 080P8001/S35L

dimension drawing

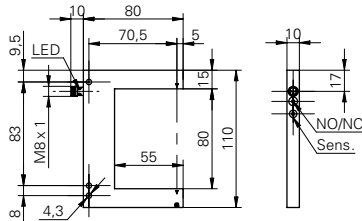

general data

type	through beam sensor
object size	> 0,05 mm
repeat accuracy	< 0,01 mm
hysteresis	< 0,02 mm
ambient light immunity	100 kLux
sensitivity adjustment	potentiometer, 270°
light source	pulsed red laser diode
wave length	670 nm
laser class	2
light indicator	LED yellow

electrical data

response time / release time	< 0,166 ms
switching frequency	< 3 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max.	30 mA
output function	light / dark operate switchable
output circuit	PNP
voltage drop Vd	< 2,8 VDC
output current	< 200 mA
short circuit protection	yes
reverse polarity protection	yes

mechanical data

width / diameter	110 mm
fork width Sb	80 mm
height / length	80 mm
penetration depth	55 mm
depth	10 mm
type	U profile
housing material	aluminum anodized
connection types	connector M8, 3 pin


ambient conditions

operating temperature	5 ... +45 °C
protection class	IP 67


photo



connection diagram

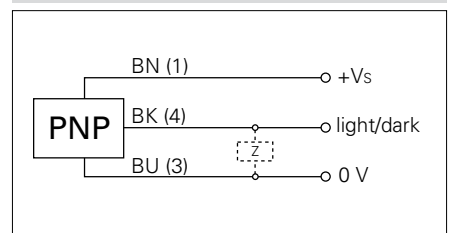

laser warning

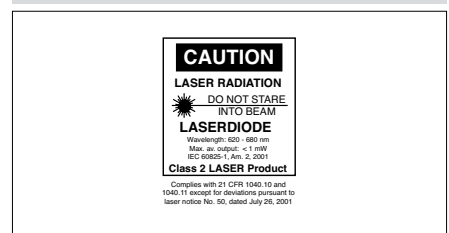

- accessories: PNP/NPN - converter